


好储能



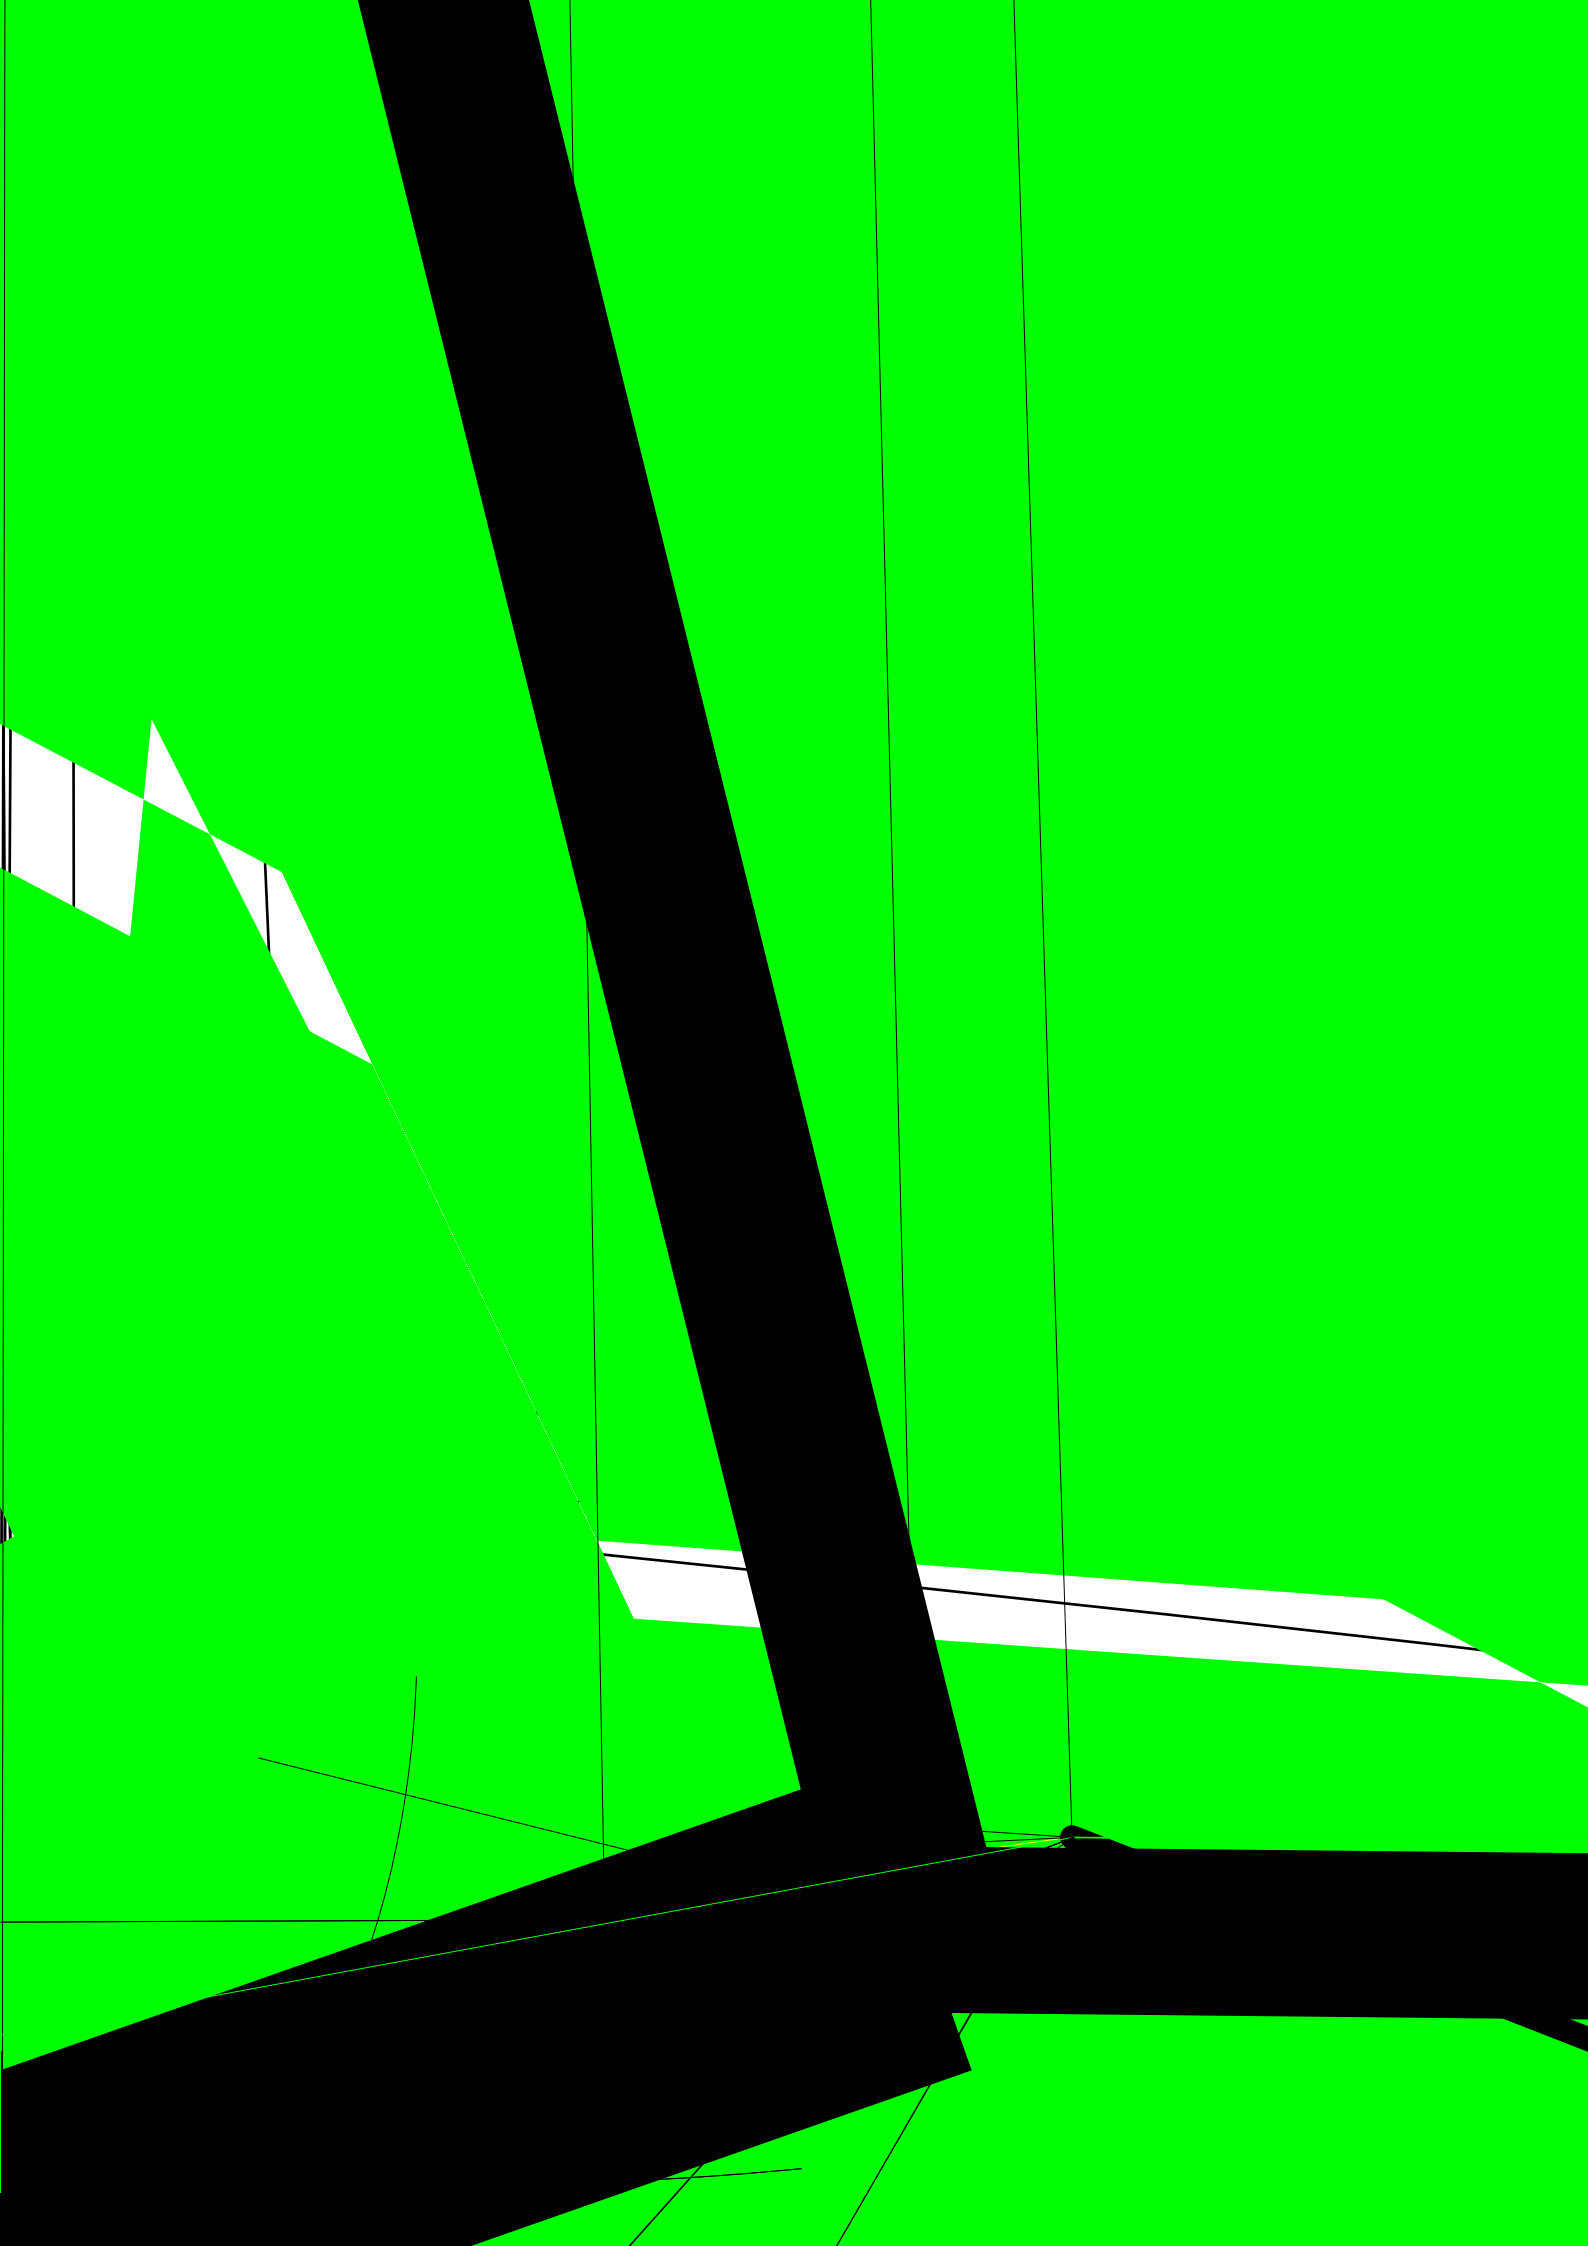

b j 38\	I ~ЫЦꞐ08 dᄁ6\ ꞑ0 I		I ~ЫЦꞐ08 dᄁ6\ ꞑЫЦ I	I ~ЫЦꞐ08 dᄁ6\ ꞑЫ0 I	I ~ЫЦꞐ08 dᄁ6\ ꞑЫЦ I
j ṙēñ ṛē					
Rated Output Power	5500VA/5000W				
Rated Output Voltage	230Vac ±4%				
Rated Output Frequency	50/60Hz ±0.3(Adaptive)				
Output Waveform	Pure sine wave				
Efficiency(Peak)	93.8%				
Rated Current	22A				
Transfer Time	10ms(Typical value)				
- UJŋ ṽē					
Rated Input Voltage	220/230Vac				
Frequency Range	(47-55Hz) ±0.3 / (57-65Hz) ±0.3				
Max Charging Current	60A				
Input Voltage Range	UPS Mains Mode: 170Vac~280Vac ±2% APLGenerator Mode: 90Vac~280Vac ±2%				
+ éẼẼÄñÜ					
Battery Type	LiFePO4				
Battery Rated Voltage	51.2V 16S				
Battery Energy	5.12KWh	10.24KWh	15.36KWh	20.48KWh	
Battery Capacity	100Ah	200Ah	300Ah	400Ah	
Max Charing/Discharing Current	100A				
DOD	80%				
Designed Life-span	3000				
DÄJJÄñéĬ véné Ĭ ÄẼÄñÖ					
Dimension. W*D*H(mm)	650*460*440	650*460*600	650*460*765	650*460*930	
Weight (kg)	83kg	131.5kg	181kg	230kg	
Communication Mode	RS485/Dry contact control Optional WIFI/GPRS/4G				
j nÄñéẼĬd' 8IJÜēkIJ Ĭ ÄIJē					
Operating Ambient Temperature	-10℃~55℃				
Humidity	5%~95% Non-condensation				
Operating Environment	Indoor				
- ÄñẼ ' ÷ éẼẼκIJÔ					
Safety Certification	CE (IEC62109-1)				
EMC Certifications	IEC/EN61000-6-1/3,CLASS B				
Transport certification	UN38.3				

Specifications are subject to change without advance notice.